



KEY FACTS

- Various mounting options (eg. excavator, farm loader).
- Due to low net weight, mountable to farm loaders, telehandlers or wheel loaders.
- Proper and simple connection at the headstock with ideal mounting angle.
- Protected and generously sized hydraulic piping.
- KTL-primed (cathodic dip-coating) and powder coating.
- Made of high-strength Hardox® steel.
- Robust and proven technology – Low-wear and low-service.

The Woodcracker® CL is also attachable to farm loaders.

Caution: Woodcracker® CL is not suitable for dangerous tree felling. Secure grip of cut material can not be guaranteed. In this case we recommend our Woodcracker® C- or CS series.

Equipment variants:



Woodcracker CL260



Woodcracker CL260 + Accumulator



Woodcracker CL260 + Accumulator + Swivel unit



Woodcracker CL260 + Swivel unit



THE FAST AND
POWERFUL
CUTTING HEAD.



VIDEO

TECHNICAL DATA




| WOODCRACKER® CL | CL 190 | CL 260 | CL 320 |
|---|-----------|-----------|------------|
| Cutting diameter soft wood (mm) | 250 | 320 | 400 |
| Cutting diameter hard wood (mm) | 190 | 260 | 320 |
| Gripper opening = shear opening (mm) | 685 | 760 | 1060 |
| Deadweight (Base – Full equipment) (kg) | 210 - 400 | 360 - 680 | 620 - 1170 |
| Recommended pump flow capacity main circuit ¹⁾ (l/min.) | 40 - 80 | 50 - 100 | 70 - 150 |
| Recommended pump flow capacity auxiliary circuit ¹⁾ (l/min.) | 20 - 30 | 40 - 60 | 45 - 60 |
| Recommended operating pressure main circuit (bar) | 250 | 280 | 280 |
| Recommended operating pressure auxiliary circuit (bar) | 200 | 200 | 200 |
| Service weight of carrier vehicle ²⁾ (t) | 2,5 - 7,5 | 6 - 14 | 12 - 20 |
| Optional: Autospeed | • | • | • |
| Optional: Cylinder swivel unit | • 2 x 40° | • 2 x 48° | • 2 x 48° |
| Optional: Accumulator | • | • | • |

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

¹⁾ Depending on operating mode or equipment. ²⁾ Depending on carrier vehicle's specifications. • available - not available

APPLICATION AREAS

- Fast harvest of small trees and bushes.
- Harvest of short rotation plantations.
- In rough terrain, hill areas and in bog areas.
- Cultivation and landscape maintenance.
- For agricultural use on a farm loader, telehandler or wheel loader.
- Maintenance measures in swamp areas and along riverbanks.

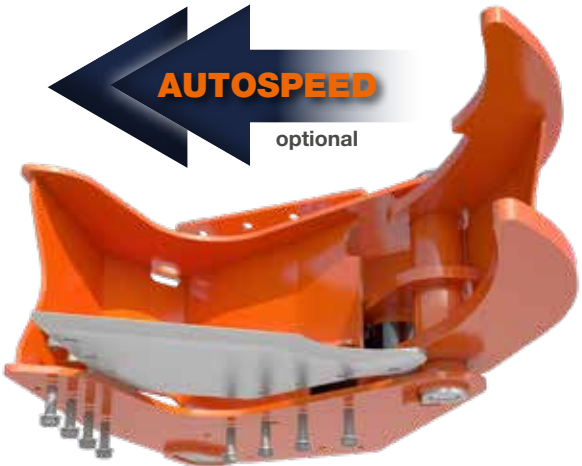

easily replaceable blade



For mini excavators from 2,5t.



Fast harvest of small trees and bushes.



Optional available with accumulator.



Woodcracker® CL190 cuts weak wood up to 25 cm.