



### KEY FACTS

- Gentle removal of the root stock from the ground, with leaving only a minimal damage to the soil.
- Through additional biomass mobilisation, another source of revenue is generated for the forestry business.
- Available in different sizes suitable for the carrier vehicle.
- Plug-and-play connection.
- Robust and proven technology – Low-wear and low-service.
- Made of high-strength Hardox® steel.

### ALTERNATIVE: RIPPER TOOTH

- Fast and cost-efficient ripper tooth.
- For temporary use.
- Available in 2 sizes.



Woodcracker® Ripper Tooth





Careful removal of the entire rootstock from the ground.



Robust cutting unit.

### TECHNICAL DATA




WOODCRACKER® R	R 900	R 1300
Opening stroke (mm)	955	1300
Cutting force (depending on operating pressure) <sup>1)</sup> (t)	up to 45	up to 65
Deadweight (kg)	1200	2100
Recommended pump flow capacity <sup>1)</sup> (l/min.)	100 - 190	120 - 250
Recommended operating pressure (bar) <sup>1)</sup> (bar)	240 - 280	250 - 310
Service weight of carrier vehicle <sup>2)</sup> (t)	25	30

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

### APPLICATION AREA

- Removal of the entire root stock from the ground.
- Chipping the root stock for further processing by using a shredder.
- Reduction of the transport volume through pre-chipping.
- Large-scale recultivation measures.
- Cleaning the ground to let the plant inventory regrow.

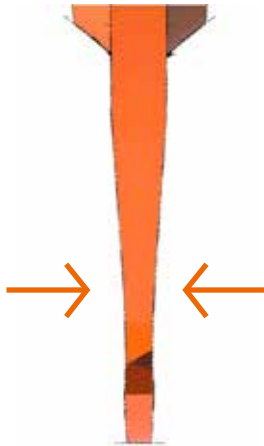

optimized sword



Used for clearing the soil.



Chipping of the harvested material.