



## THE ADAPTER FOR TELESCOPIC HANDLER.

### TECHNICAL DATA



WOODCRACKER® TA	TA 2300
Work range (mm)	up to 2160
Telescope version	inside
Deadweight (kg)	260
Admitted ultimate load <sup>1)</sup> (kg)	2000
Recommended litre capacity <sup>2)</sup> (l/min.)	50 - 90
Recommended operating pressure (bar)	200 - 280
Service weight of carrier vehicle <sup>3)</sup> (t)	15 - 25
Optional: Rotator including dual swing damper	•
Optional: Quick coupler QC10	•
Optional: Woodgripper 1270	•
Optional: Woodcracker® CS510 crane	•

<sup>1)</sup> Gross figures without attachment. Depending on carrier vehicle weight.   <sup>2)</sup> Depending on operating mode or equipment.  
<sup>3)</sup> Depending on specifications of the operation vehicle.   • available - not available


Technical data and illustrations are not binding. Subject to changes for reasons of further development.



### KEY FACTS

- Suitable for all standard telehandlers, no special modifications to the telehandler required.
- Electrical switching enables two double-acting and one single control circuit at the top of the boom.
- Due to the dual swing damper and the tilt hold function sections of the tree can be removed upright in combination with the CS510 crane.
- Perfect suited for Woodcracker® CS crane, Woodgripper, CB crane and the W-series.
- Due to the quick coupler, various attachments such as shell grapples, splitting tongs, wood grapples, etc. can be used.

ATTACHMENT OPTIONS – Adapter for telescopic handler attachment

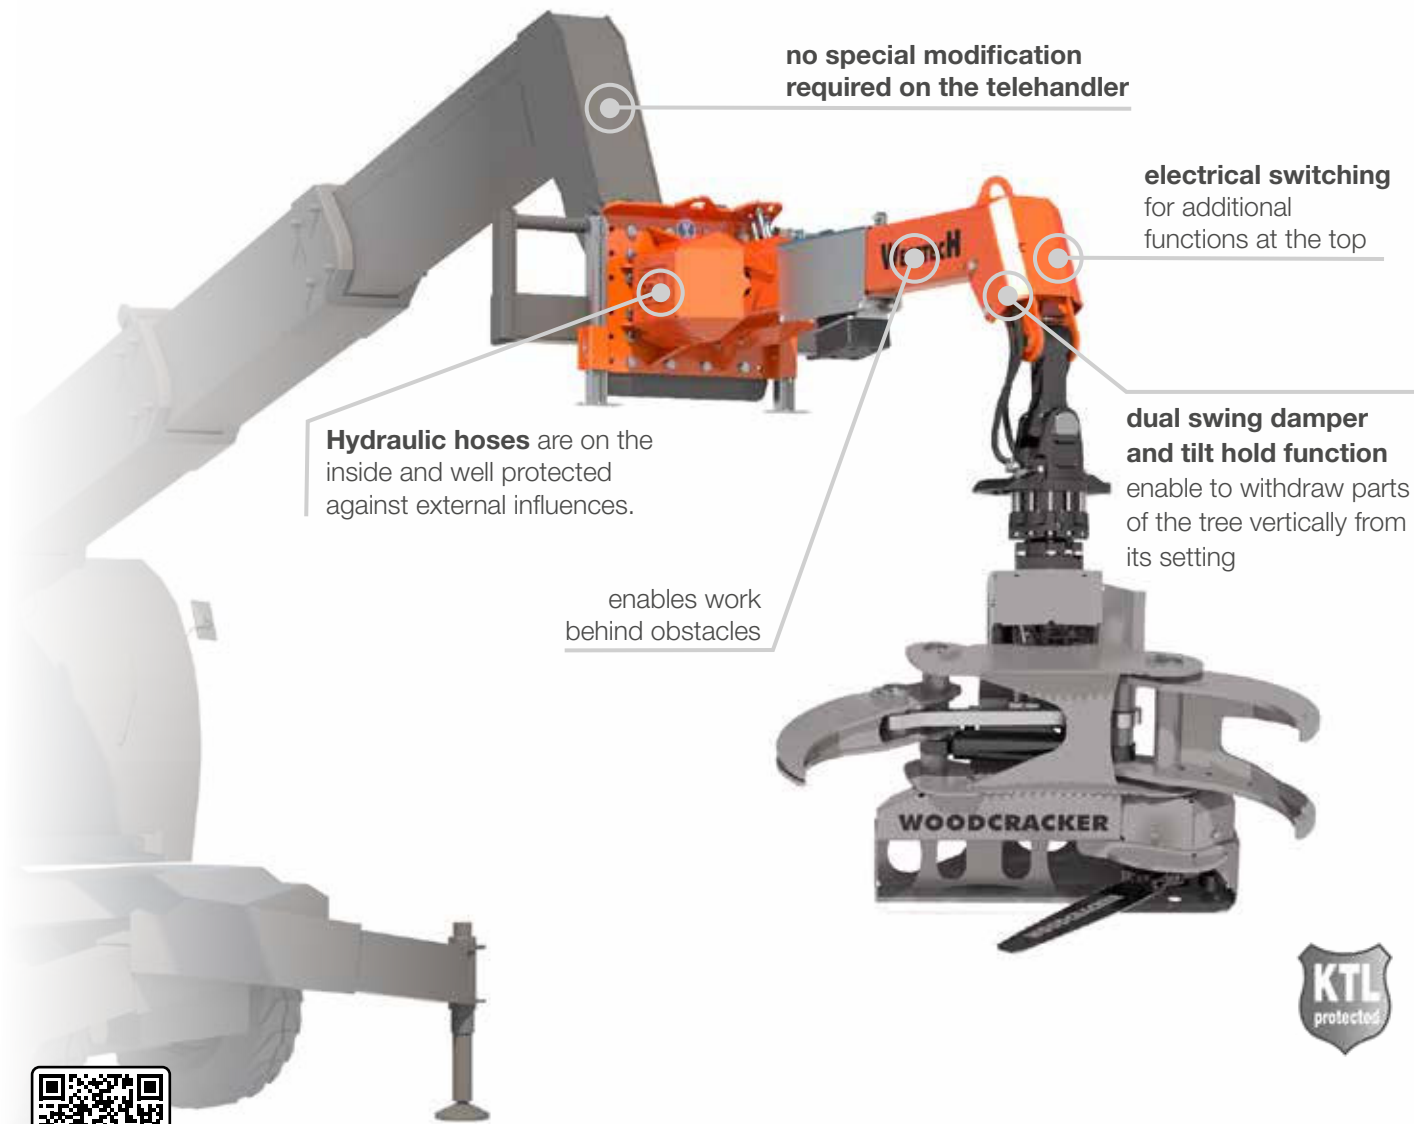

### APPLICATION AREAS

- Reach increased and more outreach due to low dead weight - ideal for tree care and applications with high reach requirements.

