



TECHNICAL DATA



WOODCRACKER® TK	TK 15	TK 30
Inclination (degree)	146	156
Deadweight (depending on attachment) ¹⁾ (kg)	275	435
Recommended pump flow capacity ¹⁾ (l/min)	40 - 60	40 - 60
Recommended operating pressure (bar)	280	280
Service weight of carrier vehicle ²⁾ (t)	up to 20	up to 28

¹⁾ Depending on operating mode or equipment. ²⁾ Depending on specifications of the operation vehicle. • available - not available


Technical data and illustrations are not binding. Subject to changes for reasons of further development.



KEY FACTS

- Flexible mounting options to common machines.
- Enables mounting of attachments to carrier vehicles with boom without tilt mechanism.
- Robust and long-lasting, low-wear and low-service.
- KTL-primed (cathodic dip painting) and powder top coat.
- Made of high-strength Hardox® steel.
- Optional: Full hydraulic quick coupler.

ATTACHMENT OPTIONS – Attachment coupler for excavator

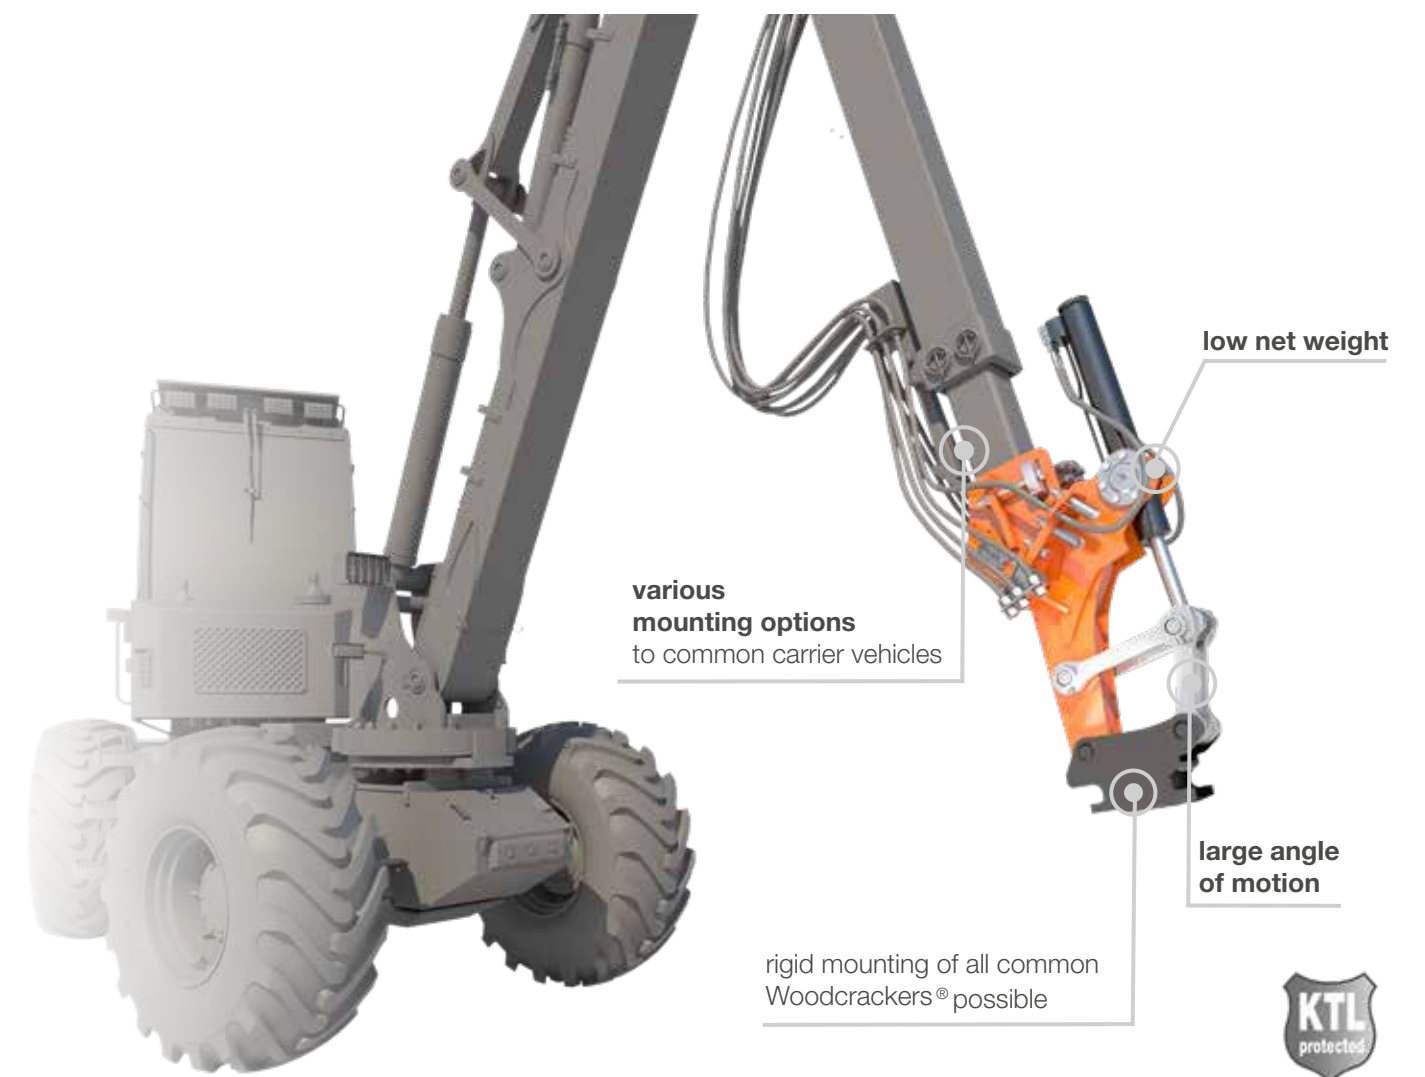

APPLICATION AREAS

- Connection adapter for harvester, telescopic handlers and rehandling excavators.
- For Woodcracker® machines, eg. C/CL/CB/W and Mulcher.
- For all other rigid-mounted excavator attachments, eg. excavator shovels, forest mulchers, etc.

