

GS600

PINZA CON MOTOSEGA GRAPPLE SAW



WATCH IT IN ACTION
GUARDA IN AZIONE



Pinza motosega CARATTERISTICHE

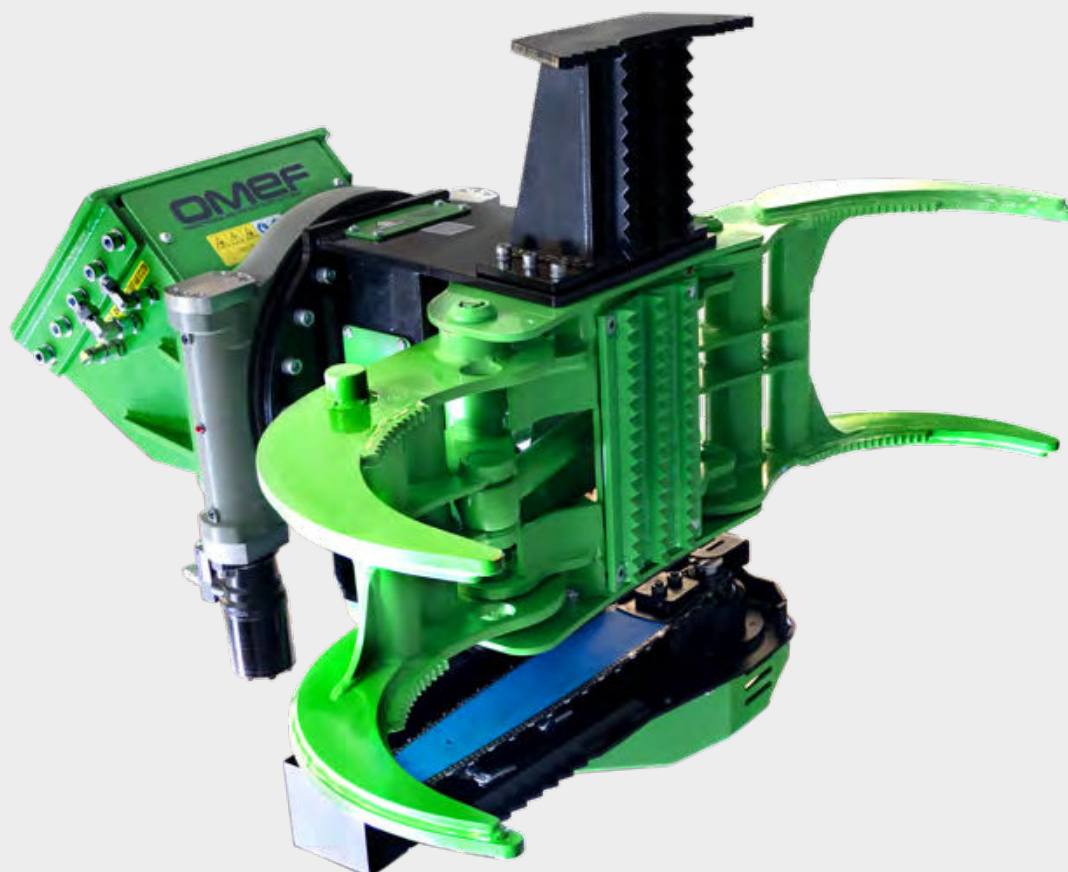
- Sviluppata per l'abbattimento di precisione di tronchi e rami.
- Consente di abbattere, sezionare i tronchi e movimentarli con la stessa macchina.
- 2 linee idrauliche:
 - 1 per gruppo motosega a un effetto;
 - 1 per pinza e rotazione a doppio effetto, con elettrovalvola.
- Applicabile su macchine operatrici con attacco fisso.
- Rotazione 360° con motori frenati.
- Realizzata in acciaio antiusura.
- Valvola VBPL (valvola di blocco e di taglio sovrappressione)
- Fornita con piastra di adattamento.
- Valvola di massima in ingresso su gruppo sega.
- Lubrificazione automatica barra sega a olio.
- Tenditore catena meccanico manuale.
- Su richiesta:**
 - sella di attacco, disponibile su misura;
 - fornitura di tubi.

Grapple saw FEATURES



- Developed for precision tree felling and pruning.
- It allows felling, sectioning, and moving trees them with the same machine.
- 2 hydraulic circuits:
 - a "one-way flow" to saw cassette;
 - a "two-way flow" to grapple and rotation with solenoid valve.
- Applicable on operating machines with fixed coupling.
- 360° rotation with self-braking motors.
- Made of wear-resistant steel.
- VBPL valve(safety lock valve and over pressure cut)
- Supplied with adapter plate.
- Inlet relief valve on saw cassette.
- Automatic oil lubrication for saw bar.
- Manual mechanical chain tensioner.
- Upon request:**
 - custom-made mounting bracket;
 - hoses.

DATI TECNICI

DATA SHEET



GS600

				
MAX	KG	min - max	min - max	min - max
12 - 22 tons	860 kg 1896 lbs	600 mm 23"	PINZA + SEGA GRAPPLE + SAW 250 bar 3625 psi ROTAZIONE ROTATION 180 bar 2610 psi	PINZA + SEGA GRAPPLE + SAW 70-100 l/min 19-26 gpm ROTAZIONE ROTATION 40 l/min 11 gpm
				
CARICO MAX. MAX. LOAD	APERTURA MAX. MAX. LOAD	360°	CATENA SAW CHAIN	
2200 kg 4850 lbs	1450 mm 57"	360°	Motore a pistoni "Parker" 10 cc "Parker" piston motor 10 cc	.404" 750 mm 29"